

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 849 820 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
02.03.2005 Bulletin 2005/09

(51) Int Cl.⁷: **H01P 1/12, H01P 5/04**

(21) Application number: **97122704.6**

(22) Date of filing: **22.12.1997**

(54) Tunable microwave network using microelectromechanical switches

Abstimmbares Mikrowellennetzwerk mit mikroeletromechanischen Schaltern

Réseau à micro-ondes accordable avec des commutateurs microélectromécaniques

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **21.12.1996 US 771610**

(43) Date of publication of application:
24.06.1998 Bulletin 1998/26

(73) Proprietor: **Hughes Electronics Corporation**
El Segundo, California 90245-0956 (US)

(72) Inventor: **De Los Santos, Hector J.**
Inglewood, California 90304 (US)

(74) Representative: **Witte, Alexander, Dr.-Ing. et al**
Witte, Weller, Gahlert, Otten & Steil,
Patentanwälte,
Rotebühlstrasse 121
70178 Stuttgart (DE)

(56) References cited:
EP-A- 0 709 911 **US-A- 3 796 976**

- **GOLDSMITH C ET AL: "MICROMECHANICAL MEMBRANE SWITCHES FOR MICROWAVE APPLICATIONS" IEEE MTT-S INTERNATIONAL MICROWAVE SYMPOSIUM DIGEST, ORLANDO, MAY 16 - 20, 1995, vol. 1, 16 May 1995, pages 91-94, XP000538549 KIRBY L (ED)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 849 820 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] This invention relates to the tuning of microwave networks, and more specifically to the tuning of filters and amplifiers using microelectromechanical (MEM) switches on monolithic microwave integrated circuits (MMICs), microwave integrated circuits (MICs) and hybrid circuits.

Description of the Related Art

[0002] A filter typically includes a network of capacitive and inductive circuits in series, parallel or some combination thereof. When a filter is implemented on a monolithic microwave integrated circuit (MMIC), networks of binary weighted unit capacitors are typically used as capacitive circuits. Binary weighted capacitors are described in J.L. McCreary et al., "All-MOS Charge Redistribution Analog-to-Digital Conversion Techniques--Part I," *IEEE J. Solid-State Circuits*, vol. SC-10, 1975, pages 371-379. A filter network has a frequency response that is determined by its configuration, the capacitance values of its capacitors and the inductance values of its inductors. Because the capacitors and inductors on a MMIC, a MIC or a hybrid circuit are usually fixed, and unlike a waveguide filter which can be tuned by using a tuning screw to change the geometry of at least one of its cavities, a filter based on a MMIC, a MIC or a hybrid circuit is generally not tunable.

[0003] Two major types of semiconductor switches, PIN diode and field effect transistor (FET), are used to change a MMIC circuit configuration. PIN diode switches for microwave applications are described in J. C. Hill et al., "PIN Diode Switches Handle High-Power Applications," *MSN*, June 1989, pages 36-40. Microwave FET switches are described in M. Shifrin et al., "Monolithic Control Components Handle 27 W of RF Power," *Microwave Journal*, December 1989, pages 119-122.

[0004] In general, PIN diode and FET switches have low isolation when the switch is off and high insertion loss when the switch is on at frequencies beyond the C-band. While PIN diode and FET switches are suitable for microwave operations at relatively low frequencies, many modern satellites operate at higher microwave frequencies in the X-band, Ku-band and Ka-band. These switches have parasitic capacitances and inductances which significantly degrade their performance at these high frequencies, and are therefore not used to reconfigure a MMIC filter for the purpose of tuning.

[0005] PIN diode and FET switches are semiconductor devices with P/N junctions that enable the activation of on/off switching and exhibit nonlinear characteristics which generate undesirable intermodulation distortions.

Moreover, the nonlinearities also generate undesired output signals at harmonic frequencies, and if the switch is used in a filter network with a poor impedance match, substantial variations in the harmonic signals can be produced, as described in J.C. Hill et al, *supra*.

[0006] The operation of a PIN diode or FET switch requires a continuous power supply to provide a bias voltage, and therefore consumes power even if the switch is in a steady state, that is, when the switch remains either on or off. Many of these switches are usually required for a microwave network on board a satellite, and the power drain from the satellite's batteries for maintaining these switches can result in a shorter operational life span of the satellite.

[0007] Tuning of a microwave network to match its impedance to a desired setting for optimal operation traditionally has been achieved by manual tuning, that is, by manually setting the effective electrical length of transmission lines in the network. One example of manual tuning uses a shunt stub, which is a terminated transmission line segment connected in parallel with the main transmission line. The shunt stub has either a short-circuit or an open-circuit termination and its length is adjustable, whereas the length of the main transmission line is usually fixed. Impedance matching using continuously adjustable shunt stubs is well known and is described in R.E. Collin, *Foundations for Microwave Engineering*, McGraw-Hill, Inc., 1966, pages 207-212.

[0008] Manual tuning is not feasible for impedance matching applications in which the microwave network that is to be tuned is not accessible, such as satellite operations. Manual tuning must be completed and the transmission line lengths fixed before the satellite is launched. Thereafter, it is not practical to optimize the performance of the microwave network by further adjusting the transmission line lengths on board the satellite.

[0009] To vary the effective electrical length of a transmission line to achieve proper tuning, semiconductor PIN diode switches and/or FET switches are placed along segments of the transmission line and are selectively turned on and off to obtain the desired electrical line length. Harmonic signals, which are generated by a power amplifier's nonlinear amplification characteristics, are at integral multiples of the fundamental frequency, and are usually undesirable in most microwave communication applications and therefore must be reduced. The harmonic signals can be reduced by tuning the effective electrical lengths of transmission lines at input and output ends of the amplifier. A typical semiconductor microwave power amplifier is described in S. Toyoda, "High Efficiency Single and Push-Pull Power Amplifiers," *IEEE MTT-S Digest*, 1993, pages 277-280.

[0010] MEM switches are small switching devices activated by an actuation voltage, and are usually manufactured on a semiconductor substrate. Suitable substrates include silicon (Si) and gallium arsenide (GaAs), which are the most common types of semiconductor

materials used in MMICs. MEM switches can also be fabricated on substrates of dielectric materials such as alumina, which is used in hybrid circuits. MEM switches for GaAs MMICs are described in L.E. Larson et al., "Microactuators for GaAs-based Microwave Integrated Circuits," IEEE Transducers '91 Conference on Solid State Sensors and Actuators, 1991, pages 743-746. The actuation voltage determines whether the switch is in an "on" or "off" state.

[0011] One type of MEM switch is the MEM cantilever beam deformable switch, which has a deformable cantilever beam arm that moves to open or close a circuit path and is described in L.E. Larson, et al, supra. The switch is small in size, with typical dimensions on the order of 17.5 microns x 125 microns, and can be manufactured on substrates of various materials, such as Si and GaAs. The switch is turned on or off by a voltage signal applied to a static electric switching electrode, which is a conductive layer deposited on the semiconductor substrate and is positioned beneath the beam arm. The switch opens or closes by moving the beam arm in response to the voltage signal. A typical actuation voltage to turn the switch on, that is, to close the circuit path with the movable beam arm, is in the range of about 70-90 volts.

[0012] MEM switches as for example disclosed in EP 0 709 911 A2 have not been used in reconfigurable microwave networks on board a spacecraft because the contact is mechanical and has been considered unstable when subjected to high levels of acceleration and/or vibration.

SUMMARY OF THE INVENTION

[0013] In view of the above problems, the present invention provides microwave tuning networks which use MEM switches to selectively change the network topology on a MMIC, a MIC or a hybrid circuit to achieve a desired frequency response. In a network comprising a plurality of inductive lines, MEM switches are connected between the lines to form a reconfigurable inductive circuit. MEM switches can also be implemented in a network of binary weighted unit capacitors to form a reconfigurable capacitive circuit. A filter is formed by combining these reconfigurable capacitive and inductive circuits in a desired network configuration. The frequency response of the filter is tunable by selectively switching at least some of the capacitive and/or inductive circuits to change the circuit configurations.

[0014] Numerous other implementations of MEM switch-based tuning networks are also feasible. In a microwave amplifier network, the MEM switches are used to adjust the effective electrical lengths of input and output transmission lines to tune the amplifier to a desired frequency response. The amplifier network can be tuned for a desired frequency response that reduces the harmonics. Connecting a number of shunt stubs of selected lengths at selected locations to the input and out-

put transmission lines changes the input and output impedances of the transmission lines, and results in a change in the frequency response of the amplifier network. Each shunt stub is connected to a transmission line by a MEM switch. By selectively closing MEM switches to some of the shunt stubs while opening others, a desired frequency response for the amplifier network can be obtained.

[0015] These and other features and advantages of the invention will be apparent to those skilled in the art from the following detailed description, taken together with the accompanying drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

FIG. 1 is a simplified plan view of a reconfigurable inductive line network connected by a plurality of switches on a substrate;

FIG. 2a is a simplified plan view of a reconfigurable binary weighted capacitor network connected by a plurality of switches on a substrate;

FIG. 2b is a sectional view taken along the section line 2b-2b of FIG. 2a, showing the plates of a binary weighted capacitor;

FIG. 3a is a simplified plan view of a microwave filter formed by connecting a plurality of capacitor and inductor networks of FIGs. 1 and 2a with a plurality of switches;

FIG. 3b is an equivalent circuit diagram of the filter in FIG. 3a;

FIG. 4a is a simplified plan view of a transmission line segment with shunt stubs connected to it via MEM switches at different locations;

FIG. 4b is a sectional view taken along the section line 4b-4b of FIG. 4a, showing the connection of an open-circuit shunt stub with the transmission line segment via a MEM switch; and

FIG. 5 is a simplified plan view of a microwave amplifier tuning network with MEM-switch-connected shunt stubs.

DETAILED DESCRIPTION OF THE INVENTION

[0017] The present invention provides microwave tuning networks using MEM switches that selectively connect different microwave components on the substrate of a MMIC, a MIC or a hybrid circuit to change the network topology for purposes such as producing a desired frequency response. Impedance matching of a transmission line is achieved by placing a number of shunt stubs at desired locations and selectively connecting the shunt stubs to the transmission line with MEM switches. In a microwave amplifier network, the transmission lines connected to the input and output of the amplifier are selectively connected to shunt stubs with MEM switches to tune the amplifier to a desired fre-

quency response. In a tunable microwave filter network, the circuit topology is changed by selectively switching the filter's capacitive and/or inductive circuits with MEM switches to produce a desired frequency response.

[0018] MEM switches have several advantages over semiconductor PIN diode or FET switches. The "on" resistance and the "off" capacitance of a typical MEM cantilever beam deformable switch are on the order of 2 ohms and 1.6 femtofarads, respectively. As a result of the low "on" resistance and low "off" capacitance, the insertion loss is as low as about 0.05 dB in the "on" state and the isolation is on the order of 33 dB in the "off" state at a frequency of about 18 GHz. MEM switches generally exhibit much lower "on" resistance and lower "off" capacitance than typical microwave PIN diode or FET switches. When switches are used to adjust the frequency response of a network, it is highly desirable that the switches be as nearly perfect as possible, i.e., nearly zero insertion loss in the "on" state and nearly infinite isolation in the "off" state. Therefore, MEM switches are better suited for reconfigurable microwave networks than semiconductor switches.

[0019] MEM switches exhibit excellent switching characteristics with low insertion loss in the "on" state and high isolation in the "off" state, from DC up to high microwave frequencies. A typical MEM switch has less than 0.5 dB insertion loss in the "on" state and greater than 25 dB isolation in the "off" state at frequencies up to about 45 GHz. Therefore, MEM switches are suitable for operations in the X-, Ku- and Ka-bands. Moreover, a MEM switch opens and closes a circuit path by the mechanical motion of its beam arm. There is no P/N junction in a MEM switch, and therefore no nonlinearities are produced by the electrical characteristics of semiconductors. The intermodulation distortions and harmonics generated by a MEM switch are so small that they are negligible for most applications.

[0020] A MEM switch consumes less power than a semiconductor PIN diode or FET switch, and does not need a continuous power supply to maintain a bias voltage. Turning on the switch requires an actuation voltage, but this voltage only provides a static electric charge that causes the beam arm to move, and the power required for switching is much less than the continuous power required for a PIN diode or a FET switch. Therefore, MEM switches are suitable for spacecraft applications in which power consumption directly affects the life span of the spacecraft.

[0021] FIG. 1 shows an embodiment of the invention in which a tunable inductive line network has a plurality of inductive lines 6a, 6b, 8a, ...8d connected by a plurality of switches 10a, 10b, ... 10k, preferably MEM switches, on a microwave circuit 11 that has a substrate 13 of a semiconductor material such as silicon or GaAs, or a dielectric material such as alumina which is used in hybrid circuits. Selective switching of at least some of the MEM switches changes the inductance value of the overall inductive line network, thereby changing its frequency response.

In this embodiment, the inductive lines 6a, 6b each have an inductance value L_1 , and the inductive lines 8a, ...8d each have an inductance value L_2 . If the switches 10a, ...10c are closed while the switches 10d, ...10k are open, only the inductive lines 6a, 6b are connected to result in an overall inductance value of $2L_1$. If the switches 10b, 10f, 10h and 10j are open while the switches 10a, 10c, 10d, 10e, 10g, 10i and 10k are closed, the overall inductance of the network is $2L_1+2L_2$. If the switches 10b, 10f, 10h and 10i are open while the switches 10a, 10c, 10d, 10e, 10g, 10j and 10k are closed, the overall inductance of the network is $2L_1+4L_2$. Other inductive network configurations are also feasible, and the individual inductive lines may have the same or different inductance values. The inductive line network as a whole can be used as a single adjustable inductor in a filter, with the adjustment made by selected switching of the MEM switches.

[0022] FIG. 2a shows an embodiment of the invention in which a tunable capacitor network has a plurality of binary weighted capacitors, the top plates 12a, 12b, ... 12g of which are connected by a plurality of switches 14a, 14b, ...14k, preferably MEM switches, on a microwave circuit 11 that has a substrate 13 of a semiconductor or a dielectric material. A binary weighted capacitor has a cross-section as shown in FIG. 2b, with the top plate 12d positioned on the semiconductor substrate 13, which is positioned on a common ground plane 16. The ground plane 16 is usually grounded, and together with the top plate 12d, functions as parallel plates for the binary weighted capacitor.

[0023] The capacitor network as a whole is used as a single adjustable capacitor in a filter on a MMIC, a MIC or a hybrid circuit. Returning to FIG. 2a, the MEM switches 14a, 14b, ...14k are selectively switchable so that the topology of the capacitor circuit can be reconfigured to change the capacitance value of the overall network, thereby changing its frequency response. In this embodiment, the capacitors 12a, 12b, ...12g each have a capacitance value C_1 , and a transmission line segment 18 is connected to the capacitors via the switches 14b, 14c and 14d. Different network capacitances are obtained by connecting some of the capacitors while disconnecting others. For example, to obtain an overall network capacitance of $2C_1$, the switches 14a, 14c and 14j are closed while the switches 14b, 14d, 14e, 14f, 14g, 14h, 14i and 14k are open. To obtain a network capacitance of $4C_1$, the switches 14a, 14b, 14e, 14h, 14i and 14k are closed while the switches 14c, 14d, 14f, 14g and 14j are open. FIG. 2a illustrates only one configuration of a MEM-switch-connected capacitor network; other configurations are also feasible.

[0024] FIG. 3a shows still another embodiment of the invention in which a tunable filter combines the capacitor and inductor networks along the lines of FIGs. 1 and 2a. An input transmission line 20 is connected to a binary weighted capacitor 22a with a capacitance value C_2 , and the capacitor 22a is connected to a capacitor net-

work 24a that is similar to FIG. 2a and includes a plurality of MEM switches to adjust the network's capacitance. The capacitor 22a is connected to an inductor circuit 26a that is similar to FIG. 1. A filter is formed by repeating the structure of alternately connected capacitors 22a, 22b, 22c, the respective capacitor networks 24a, 24b, 24c and the inductor networks 26a, 26b. The filter's output signal is transmitted from the capacitor 22c to an output transmission line 28. The equivalent circuit of FIG. 3a is shown in FIG. 3b, in which the capacitances C_a , C_b and C_c are the sums of the capacitance values of the capacitors 22a, 22b and 22c and the tunable capacitor networks 24a, 24b and 24c, respectively. The inductances L_a and L_b are the inductance values of the tunable inductive line networks 26a and 26b, respectively. Each of the capacitance values C_a , C_b and C_c and the inductance values L_a and L_b , which together determine the frequency response of the filter, can be changed by selectively switching at least some of the MEM switches within the capacitor and inductor networks. The filter is tuned to a desired frequency response by closing some of the switches while opening others. FIGs. 3a and 3b illustrate only one filter configuration; other configurations are also feasible.

[0025] FIG. 4a shows an impedance matching network with a main transmission line segment 40 having an input 42 and an output 44. The network is implemented on the -substrate 13 of a microwave circuit 11, which also includes a ground plane beneath the substrate to form a complete transmission line circuit. The transmission line 40 has a characteristic impedance, which is generally real and is substantially frequency independent. The impedance of a load at the output 44 may have a value different from that of the transmission line's characteristic impedance, and may even be complex if the load has a capacitive and/or an inductive component. If the characteristic impedance of the transmission line is different from the load impedance and the effective electrical line length is not properly tuned, a mismatch occurs and the input 42 is subjected to a voltage and/or current reflection from the network. Similarly, if there is a mismatch between the transmission line's characteristic impedance and the input impedance at the input 42, the output 44 is subjected to a reflection. The reflected waves interfere with desired microwave transmission, reduce transmission efficiency and cause undesired resonance along the transmission line.

[0026] The impedance mismatch is frequency-dependent for a fixed effective electrical line length. The mismatch within a selected frequency range can be reduced to produce a desired frequency response by connecting one or more shunt stubs of predetermined lengths at selected locations along the transmission line. Since conventional tuning by continuously adjusting the length of a shunt stub is infeasible in spacecraft applications, shunt stubs of fixed lengths must be provided. To obtain a desired effective electrical length for the transmission line, a plurality of shunt stubs 50 are

preferably positioned on the substrate 13 on one or both sides of the transmission line 40. Each shunt stub has a termination 52 which can be either open or short circuited. On a MMIC or a MIC substrate, it is preferred that the shunt stubs have open-circuit terminations so that no connections between the stubs and the ground plane need to be provided. Short-circuit termination on a MMIC or a MIC requires a conductor that penetrates through the substrate to electrically connect the shunt stub to the ground plane, and therefore would be more difficult to manufacture. However, a short circuit is able to provide a more stable termination in a wide frequency range and is therefore desirable in some applications.

[0027] Each shunt stub 50 is connected to the main transmission line 40 via a respective MEM switch 54. By selectively closing MEM switches to some of the shunt stubs while opening others, a desired frequency response for the transmission line can be obtained to reduce the impedance mismatch within a desired frequency range. The spacing between MEM switches for adjacent shunt stubs along the transmission line is preferably about one-quarter of a wavelength, or an integral multiple of one-quarter wavelength. The length of each shunt stub is preferably about one-half of a wavelength, or an integral multiple of one-half wavelength. Other combinations of shunt stub lengths and spacings are also feasible. The shunt stubs need not have the same length, and the spacings need not be the same.

[0028] FIG. 4b shows a cross-sectional view along the section line 4b-4b, with the transmission line 40, the MEM switch 54 and the shunt stub 50 on the substrate 13. A common ground plane 56 is positioned beneath the substrate 13. The MEM switch has a movable cantilever beam arm 58, which has a fixed end anchored to a conductive switch pad 60 and a moving end that is adapted to connect electrically with a contact pad 64 when the switch is closed. The motion of the beam arm 58 is controlled by an activating voltage supplied to a switching electrode 66, which is located on the substrate 13 beneath the beam arm 58. The beam arm itself acts as another electrode that deforms and moves toward the switching electrode when an activating voltage appears on the switching electrode 66, so that the moving end touches the contact pad 64. The activating voltage is generally in the range of about 70-90 V. The contact pad 64 is connected to the transmission line 40, and the switch pad 60 is connected to the shunt stub 50, which has an open-circuit termination 52.

[0029] FIG. 5 shows an amplifier network on the substrate 13 of a microwave circuit 11. The circuit comprises a solid-state amplifier 70, which amplifies an input microwave signal from an input 72 and produces an amplified signal at an output 74. Most solid-state microwave amplifiers, especially power amplifiers, have a nonlinear transfer response characteristic which produces undesired harmonic output signals. The harmonic signals are generated at frequencies which are integral multiples of the fundamental frequency, that is, the

frequency of the input signal. An input transmission line segment 76 is connected to feed the input signal to the amplifier input, and an output transmission line segment 78 is connected to the amplifier output to transmit the output signal. A harmonic tuning transmission line segment 80 that branches off from the output transmission line segment 78 is preferably provided for reducing the harmonics generated by the amplifier.

[0030] A plurality of shunt stubs 50 are connected to the input transmission line segment 76 via respective MEM switches 54 in a configuration similar to that shown in FIG. 4a. The shunt stubs preferably each have an open-circuit termination 52. The MEM switches are selectively turned on or off to match the input impedance, so that an input signal can be transmitted to the amplifier input 72 without being reflected back to the input line segment 76.

[0031] Similarly, the output transmission line segment 78 is also provided with a plurality of shunt stubs 50 connected via respective MEM switches 54 similar to FIG. 4a. The output impedance is matched by selective switching of at least some of the shunt stubs to reduce the reflection within a desired frequency range. Output impedance matching is important in that most solid-state microwave amplifiers are very sensitive to power reflected into the output end of the amplifier, and can be physically damaged or destroyed if the reflected power is high enough. Therefore, preventing reflection from the output line segment 78 into the amplifier output 74 is imperative to ensure safe amplifier operation. Additional shunt stubs and their associated MEM switches may be provided along the output line segment 78 to allow for fine tuning to further reduce the reflection to the amplifier output 74. The shunt stubs may have different lengths and different spacings to reduce the reflection over a desired frequency range.

[0032] The harmonic tuning transmission line segment 80 is connected to a plurality of shunt stubs 50 via respective MEM switches 54, which are selectively turned on or off to reduce the amplitudes of harmonic output signals. An amplifier may produce several harmonic frequency signals that must be suppressed, and the shunt stubs 50 with respective terminations 52 are arranged to prevent these signals from being transmitted to the output line segment 78. A properly tuned harmonic tuning line segment directs the harmonic signals to a load 82, which is preferably provided at the end of the harmonic tuning line segment 80 to absorb the energy of the harmonic signals, which will not be reflected back to the output line segment 78. The shunt stubs with different spacings and/or different lengths may be used to optimize the absorption of the harmonics of interest.

Claims

1. A tuning network adapted to spacecraft applications on a monolithic microwave integrated circuit

(MMIC) including a substrate (13) and comprising at least one transmission line (18; 20; 28; 40) having input and output transmission lines on the surface of said substrate (13) and a common ground plane (16; 56) underneath said substrate (13), at least one microwave impedance component (6, 8; 12; 50) connected to provide a microwave signal path to the transmission line (18; 20; 28; 40) and at least one microelectromechanical (MEM) switch (10; 14; 54) connected to control the microwave signal path between the at least one component (6, 8; 12; 50) and the at least one transmission line (18; 20; 28; 40).

2. The network of claim 1, **characterized in that** the at least one microwave component (6, 8; 12; 50) is configured as a plurality of capacitors (12a - 12g, 22a - 22c; 24a - 24c), at least some of the capacitors (12a - 12g, 22a - 22c) being controllably connected by the MEM switches (14a - 14k) to adjust the frequency response of the network.
3. The network of claim 2, **characterized in that** the capacitors (12a - 12g, 22a - 22c; 24a - 24c) comprise binary weighted capacitors (22a - 22c).
4. The network of any of claims 1 - 3, **characterized in that** the at least one microwave impedance component (6, 8; 12; 50) is configured as a plurality of inductors (6a - 6b, 8a - 8d) at least some of the inductors (6a - 6b, 8a - 8d) being controllably connected with by the MEM switches (10a - 10k) to adjust the frequency response of the network.
5. The network of any of claims 1 - 4, **characterized in that** the at least one microwave component (6, 8; 12; 50) comprises a plurality of inductors (6a - 6b, 8a - 8d; L_a , L_b) and a plurality of capacitors (12a - 12g, 22a - 22c; 24a - 24c; C_a , C_b , C_c), at least some of which being controllably connected by the MEM switches (10a - 10k; 14a - 14k) to adjust the frequency response of the network to form a tunable filter.
6. The network of any of claims 1 - 5, **characterized in that** the at least one microwave component (6, 8; 12; 50) is configured as a plurality of shunt stubs (50) at selected locations adjacent the at least one transmission line (40), and that a plurality of the MEM switches (54) are connected to adjust the impedance of the at least one transmission line (40).
7. The network of any of claims 1 - 6, comprising an amplifier (70) having an input (72) and an output (74), **characterized by:**

- a) the at least one transmission line (40) comprising an input transmission line (76) connected to convey an input signal to the amplifier in-

put (72), and an output transmission line (78) connected to transmit an amplified signal from the amplifier output (74);

b) the at least one microwave impedance component (6, 8; 12; 50) comprising a plurality of shunt stubs (50) at selected locations adjacent the input and output transmission lines (76, 78); and

c) the at least one MEM switch (54) comprising a plurality of MEM switches (54) controllably connected between the transmission lines (76, 78) and respective shunt stubs (50) to adjust the impedance of the input transmission line (76) and/or the impedance of the output transmission line (78).

8. The network of claim 7, wherein the amplifier (70) generates an output signal including at least one harmonic, **characterized by**:

a) a harmonic tuning transmission line (80) connected to provide a harmonic signal path from the amplifier output (74) to a load (82) connected to its end;

b) additional shunt stubs (50) at selected locations adjacent the harmonic tuning transmission line (80); and

c) additional MEM switches (54) controllably connected between the harmonic tuning transmission line (80) and respective additional shunt stubs (50) to reduce harmonic signal reflection from the harmonic tuning transmission line (80) to the output transmission line (78).

9. The network of any of claims 6 - 8, **characterized in that** at least some of the shunt stubs (50) comprise open-circuit terminations (52).

10. The network of any of claims 6 - 9, **characterized in that** at least some of the shunt stubs (50) comprise short-circuit terminations (52).

Patentansprüche

1. Ein Abstimm-Netzwerk, das für Weltraumfahrzeug-Anwendungen ausgelegt ist, auf einer monolithischen integrierten Mikrowellenschaltung (MMIC), mit einem Substrat (13) und zumindest einer Übertragungsleitung (18; 20, 28; 40), die Eingangs- und Ausgangsübertragungsleitungen auf der Oberfläche des Substrats (13) und eine gemeinsame Masseebene (16; 56) unterhalb des Substrats (13) haben, zumindest einer Mikrowellenimpedanzkompo-

nente (6, 8; 12; 50), die verbunden ist, um einen Mikrowellensignalpfad zu der Übertragungsleitung (18; 20, 28; 40) bereitzustellen, und zumindest einem mikroelektromechanischer (MEM) Schalter (10; 14; 54), der verbunden ist, um den Mikrowellensignalpfad zwischen der zumindest einen Komponente (6, 8; 12; 50) und der zumindest einen Übertragungsleitung (18; 20, 28; 40) zu steuern.

2. Netzwerk nach Anspruch 1, **dadurch gekennzeichnet, dass** zumindest die eine Mikrowellenkomponente (6, 8; 12; 50) als eine Vielzahl von Kapazitäten (12a-12g, 22a-22c; 24a-24c) konfiguriert ist, wobei zumindest einige der Kapazitäten (12a-12g, 22a-22c) steuerbar verbunden sind über die MEM Schalter (14a-14k), um die Frequenzantwort des Netzwerks einzustellen.

3. Netzwerk nach Anspruch 2, **dadurch gekennzeichnet, dass** die Kapazitäten (12a-12g, 22a-22c; 24a-24c) binär gewichtete Kapazitäten (22a-22c) aufweisen.

4. Netzwerk nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die zumindest eine Mikrowellenimpedanzkomponente (6, 8; 12; 50) als eine Vielzahl von Induktoren (6a-6b, 8a-8d) konfiguriert ist, wobei zumindest einige der Induktoren (6a-6b, 8a-8d) steuerbar verbunden sind über die MEM Schalter (10a-10k), um die Frequenzantwort des Netzwerks einzustellen.

5. Netzwerk nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** zumindest eine Mikrowellenkomponente (6, 8; 12; 50) eine Vielzahl von Induktoren (6a-6b, 8a-8d; L_a , L_b) und eine Vielzahl von Kapazitäten (12a-12g, 22a-22c; 24a-24c; C_a , C_b , C_c) aufweist, wobei einige davon steuerbar verbunden sind über die MEM Schalter (10a-10k; 14a-14k), um die Frequenzantwort des Netzwerks einzustellen, um einen abstimbaren Filter auszubilden.

6. Netzwerk nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** zumindest eine Mikrowellenkomponente (6, 8; 12; 50) als eine Vielzahl von Shunt-Stichleitungen (50) an ausgewählten Orten benachbart der zumindest einen Übertragungsleitung (40) konfiguriert ist, und dass eine Vielzahl der MEM Schalter (54) verbunden sind, um die Impedanz der zumindest einen Übertragungsleitung (40) einzustellen.

7. Netzwerk nach einem der Ansprüche 1 bis 6 mit einem Verstärker (70) mit einem Eingang (72) und einem Ausgang (74), **gekennzeichnet durch**:

a) die zumindest eine Übertragungsleitung (40)

umfasst eine Eingangsübertragungsleitung (76), die verbunden ist, um ein Eingangssignal zu dem Verstärkereingang (72) zu führen, und eine Ausgangsübertragungsleitung (78), die verbunden ist, um ein verstärktes Signal von dem Verstärkerausgang (74) zu übertragen;
 b) die zumindest eine Mikrowellenimpedanzkomponente (6, 8; 12; 50) umfasst eine Vielzahl von Shunt-Stichleitungen (50) an ausgewählten Orten benachbart der Eingangs- und der Ausgangsübertragungsleitung (76, 78); und
 c) der zumindest eine MEM Schalter (54) umfasst eine Vielzahl von MEM Schaltern (54), die steuerbar verbunden sind zwischen den Übertragungsleitungen (76, 78) und jeweiligen Shunt-Stichleitungen (50), um die Impedanz der Eingangsübertragungsleitung (76) und/oder die Impedanz der Ausgangsübertragungsleitung (78) einzustellen.

8. Netzwerk nach Anspruch 7, wobei der Verstärker (70) ein Ausgangssignal erzeugt, das zumindest eine Oberwelle enthält, **gekennzeichnet durch:**

a) eine Oberwellenabstimmübertragungsleitung (80), die verbunden ist, um einen Oberwellensignalpfad von dem Verstärkerausgang (74) zu einer Last (82) bereitzustellen, die mit dessen Ende verbunden ist;
 b) zusätzliche Shunt-Stichleitung (50) an ausgewählten Orten benachbart der Oberwellenabstimmübertragungsleitung (80); und
 c) zusätzliche MEM Schalter (54), die zwischen der Oberwellenabstimmübertragungsleitung (80) und jeweiligen zusätzlichen Shunt-Stichleitungen (50) steuerbar verbunden sind, um die Oberwellensignalreflexion von der Oberwellenabstimmübertragungsleitung (80) zu der Ausgangsübertragungsleitung (78) zu reduzieren.

9. Netzwerk nach einem der Ansprüche 6 bis 8, **dadurch gekennzeichnet, dass** zumindest einige der Shunt-Stichleitungen (50) Abschlüsse (52) mit offenem Stromkreis besitzen.

10. Netzwerk nach einem der Ansprüche 6 bis 9, **dadurch gekennzeichnet, dass** zumindest einige der Shunt-Stichleitungen (50) Abschlüsse (52) mit geschlossenem Stromkreis besitzen.

Revendications

1. Réseau de réglage adapté pour les applications aérospatiales sur un circuit intégré à hyperfréquences monolithique (MMIC) comprenant un substrat (13) et comprenant au moins une ligne de transmission

(18 ; 20, 28 ; 40) comprenant des lignes de transmission d'entrée et de sortie sur la surface dudit substrat (13) et un plan de masse commun (16 ; 56) au-dessous dudit substrat (13), au moins un composant d'impédance hyperfréquence (6, 8 ; 12 ; 50) raccordé pour fournir un chemin de signal hyperfréquence vers la ligne de transmission (18 ; 20, 28 ; 40) et au moins un commutateur micro-électromécanique (MEM) (10 ; 14 ; 54) raccordé pour commander le chemin de signal hyperfréquence entre le au moins un composant (6, 8 ; 12 ; 50) et la au moins une ligne de transmission (18 ; 20, 28 ; 40).

2. Réseau selon la revendication 1, **caractérisé en ce que** le au moins un composant hyperfréquence (6, 8 ; 12 ; 50) est configuré comme une pluralité de condensateurs (12a - 12g, 22a - 22c ; 24a - 24c), au moins quelques-uns des condensateurs (12a - 12g ; 22a - 22c) étant raccordés en commande par les commutateurs MEM (14a - 14k) pour ajuster la réponse en fréquence du réseau.

3. Réseau selon la revendication 2, **caractérisé en ce que** les condensateurs (12a - 12g, 22a - 22c ; 24a - 24c) comprennent des condensateurs pondérés binaires (22a - 22c).

4. Réseau selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** le au moins un composant à impédance hyperfréquence (6, 8 ; 12 ; 50) est configuré comme une pluralité d'inductances (6a - 6b, 8a - 8d), au moins quelques-unes des inductances (6a - 6b, 8a - 8d) étant raccordées en commande avec les commutateurs MEM (10a - 10k) pour ajuster la réponse en fréquence du réseau.

5. Réseau selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** le au moins un composant hyperfréquence (6, 8 ; 12 ; 50) comprend une pluralité d'inductances (6a - 6b, 8a - 8d ; L_a , L_b) et une pluralité de condensateurs (12a - 12g, 22a - 22c ; 24a - 24c ; C_a , C_b , C_c), au moins une partie desquels étant raccordés en commande par les commutateurs MEM (10a - 10k ; 14a - 14k) pour ajuster la réponse en fréquence du réseau pour former un filtre ajustable.

6. Réseau selon l'une quelconque des revendications 1 à 5, **caractérisé en ce que** le au moins un composant hyperfréquence (6, 8 ; 12 ; 50) est configuré comme une pluralité d'embases de dérivation (50) à des emplacements sélectionnés adjacents à la au moins une ligne de transmission (40), et **en ce qu'**une pluralité des commutateurs MEM (54) est raccordée pour ajuster l'impédance de la au moins une ligne de transmission (40).

7. Réseau selon l'une quelconque des revendications 1 à 6, comprenant un amplificateur (70) comprenant une entrée (72) et une sortie (74), **caractérisé en ce que** :

5

a) la au moins une ligne de transmission (40) comprend une ligne de transmission d'entrée (76) raccordée pour transporter un signal d'entrée vers l'entrée d'amplificateur (72) et une ligne de transmission de sortie (78) raccordée pour transmettre un signal amplifié depuis la sortie d'amplificateur (74) ;

10

b) le au moins un composant à impédance hyperfréquence (6, 8 ; 12 ; 50) comprend une pluralité d'embases de dérivation (50) à des emplacements sélectionnés adjacents aux lignes de transmission d'entrée et de sortie (76, 78) ; et

15

c) le au moins un commutateur MEM (54) comprend une pluralité de commutateurs MEM (54) raccordés en commande entre les lignes de transmission (76, 78) et des embases de dérivation respectives (50) pour ajuster l'impédance de la ligne de transmission d'entrée (76) et/ou l'impédance de la ligne de transmission de sortie (78).

20

25

8. Réseau selon la revendication 7, dans lequel l'amplificateur (70) génère un signal de sortie comprenant au moins une harmonique, **caractérisé par** :

30

a) une ligne de transmission de réglage d'harmonique (80) raccordée pour fournir un trajet de signal d'harmonique depuis la sortie d'amplificateur (74) vers une charge (82) raccordée à son extrémité ;

35

b) des embases de dérivation supplémentaires (50) à des emplacements sélectionnés adjacents à la ligne de transmission de réglage d'harmonique (80) ; et

40

c) des commutateurs MEM supplémentaires (54) raccordés en commande entre la ligne de transmission de réglage d'harmonique (80) et des embases de dérivation supplémentaires respectives (50) pour réduire la réflexion de signal harmonique depuis la ligne de transmission de réglage d'harmonique (80) vers la ligne de transmission de sortie (78).

45

9. Réseau selon l'une quelconque des revendications 6 à 8, **caractérisé en ce qu'**au moins quelques-unes des embases de dérivation (50) comprennent des raccordements en circuit ouvert (52).

50

10. Réseau selon l'une quelconque des revendications 6 à 9, **caractérisé en ce qu'**au moins quelques-unes des embases de dérivation (50) comprennent des raccordements en court-circuit (52).

55

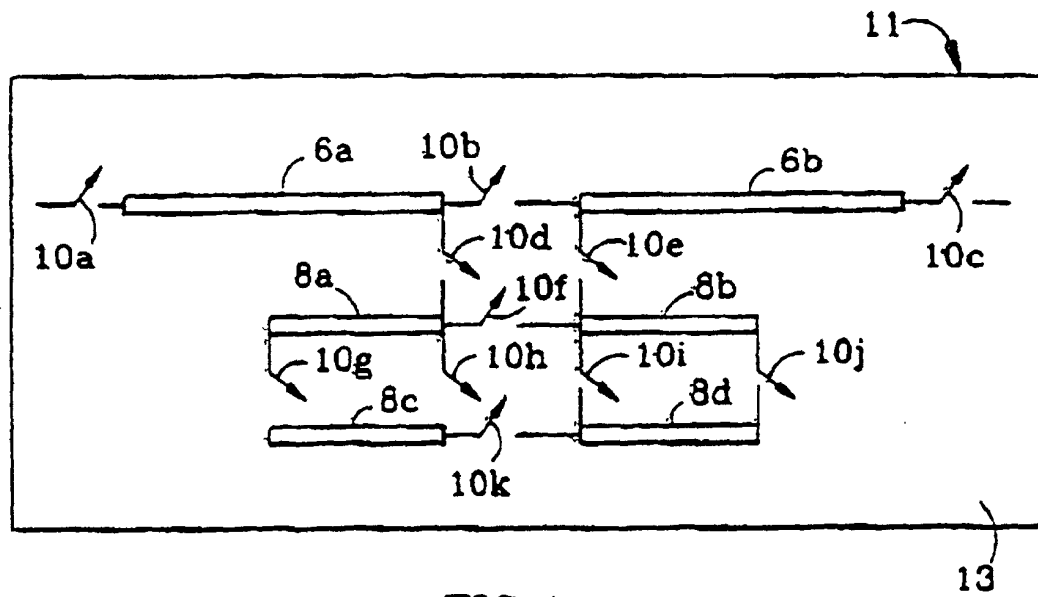


FIG. 1

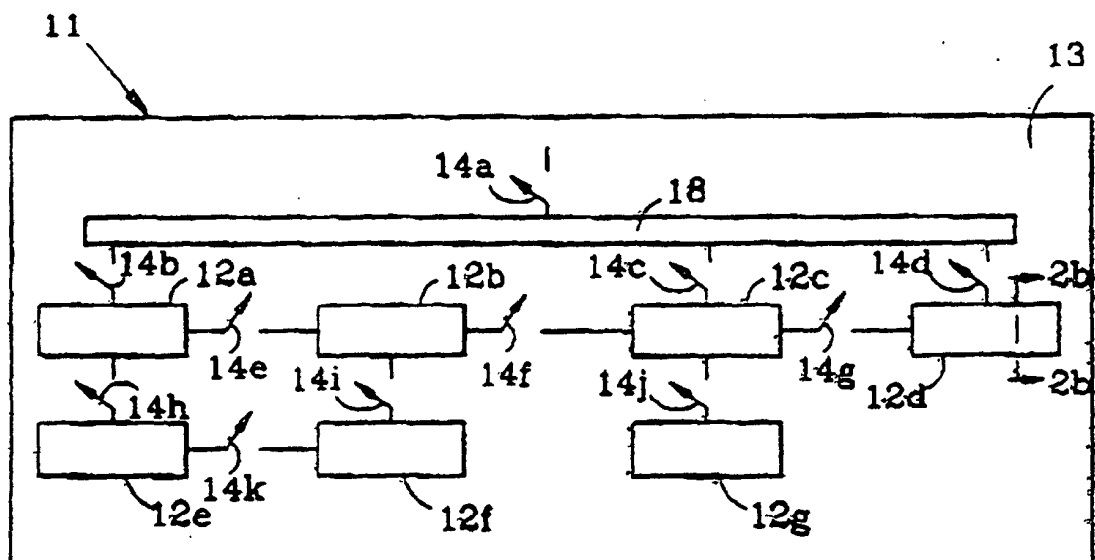


FIG. 2a




FIG. 2b

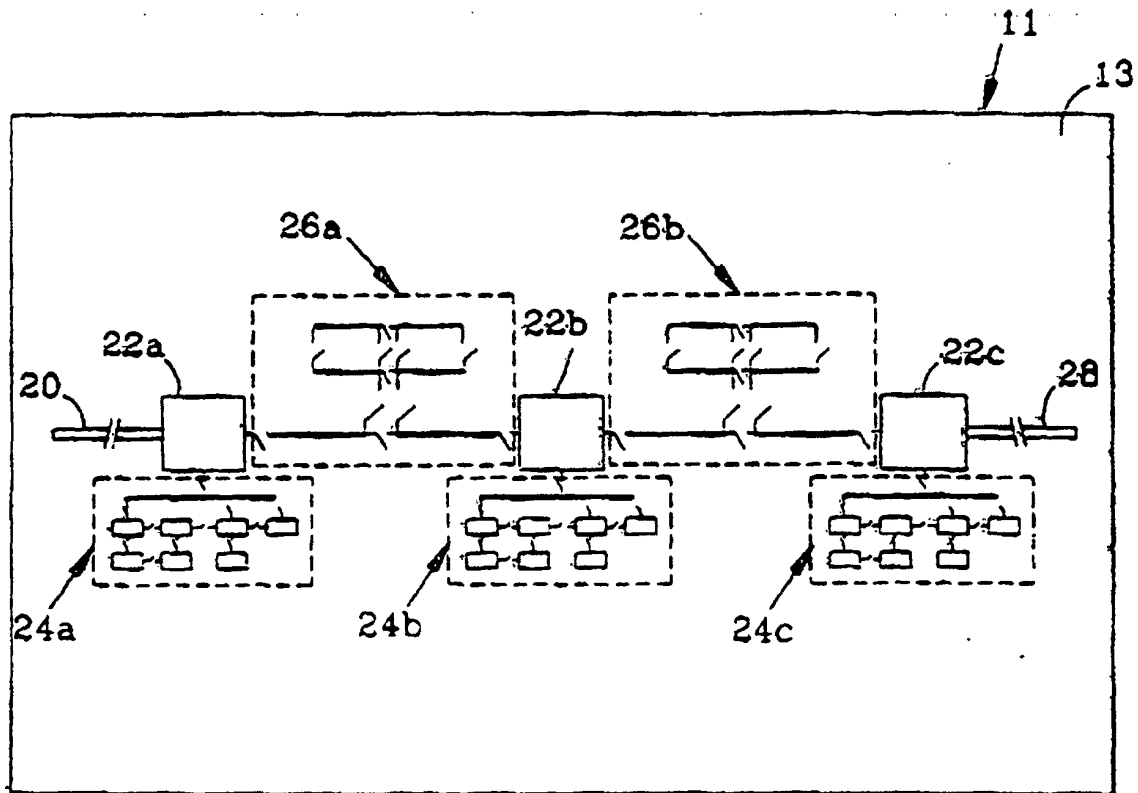


FIG. 3a

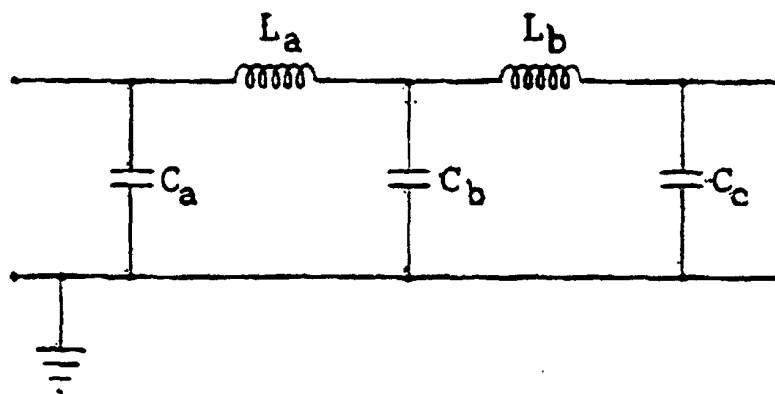


FIG. 3b

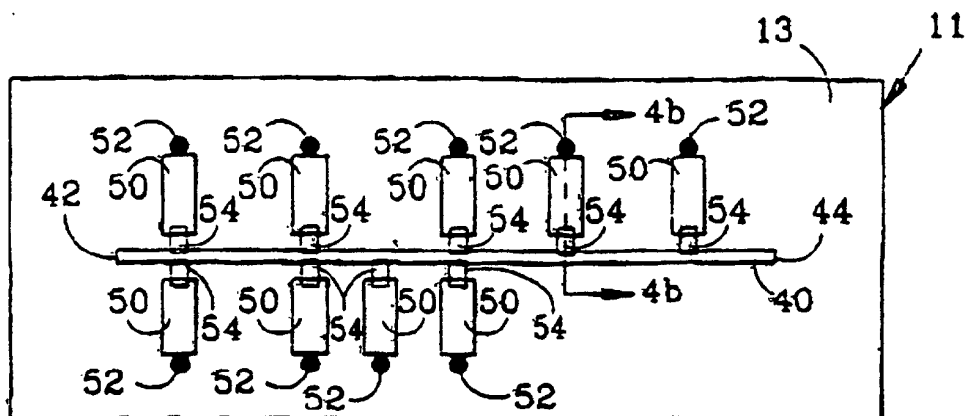


FIG. 4a

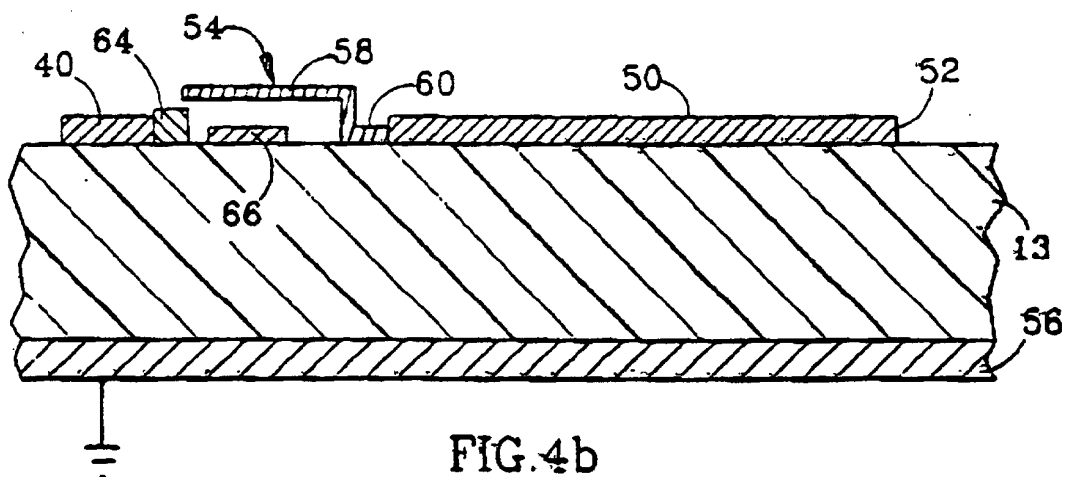


FIG. 4b

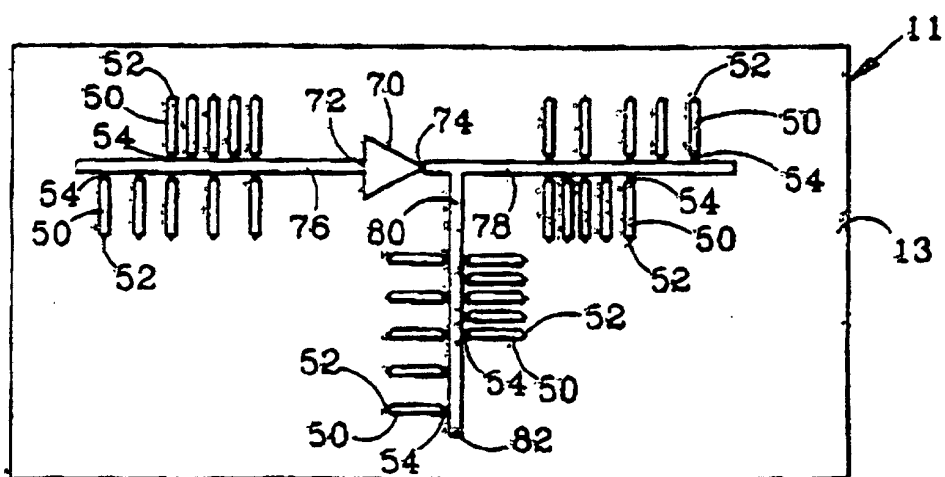


FIG. 5